


PDS-1502A

15" Industrial Flat Panel Monitor

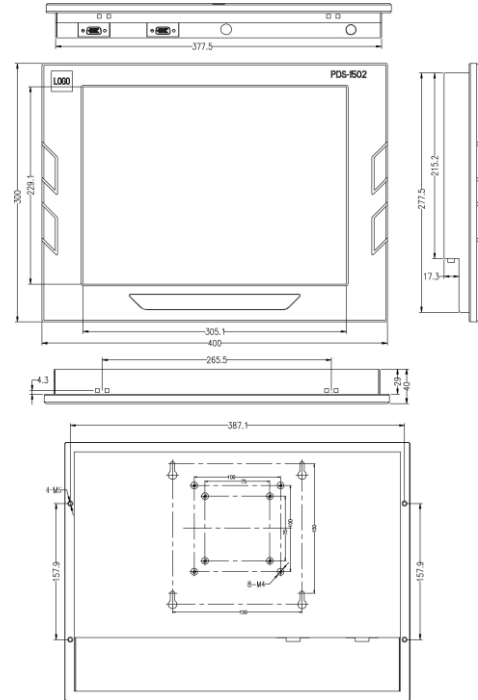

1

Embedded Boards & Industrial Computers

2

Embedded Systems

3

Communications & Network Application Platform

4

Rugged Computers

Specifications

Product Type	Industrial Flat Panel Monitor
Display Screen	15" TFT LCD, external VGA interface
Brightness	350cd/m ²
Viewing Angel	160°(H)/160°(V)
Supported Color	16.2M colors(RGB 8-bit)
Contrast Ratio	700:1
Resolution	1024 x 768
Response Time	8ms
Power Supply	External power supply adapter
Power Consumption	Typical 11.5W@6.5mA
Dimensions	400mm (W) x 300mm (H) x 40mm (D)
Net Weight	4.94kg
Protection Grade	Optional IP65 front panel, overall IP54
Reliability	MTBF ≥ 50000h; MTTR ≤ 0.5 h
Operating Temperature	0°C ~ 50°C
Storage Temperature	-20°C ~ 60°C
Relative Humidity	5%~93%, 40°C non-condensing
Shock	15g peak acceleration (11 ms duration)
Vibration	5-19Hz/1.0mm amplitude, 19-200Hz/1.0g acceleration
Installation	VESA, wallmount and wall-embedded

Features

- 15" TFT LCD screen, touch screen optional
- LCD brightness and contrast ratio adjustable manually or automatically, standby power-save mode
- High-strength and elegant Al-alloy panel, stylish design
- Optional IP65 front panel, overall IP54
- Installation compatible with VESA, wallmount and wall-embedded

Ordering Information

Part Number	Model Number	Description
0020-012201	PDS-1502/touch screen	15" panel monitor/touch screen/FSP060-1AD101C/with OSD
0020-012231	PDS-1502/tempered glass	15" panel monitor/tempered glass/FSP060-1AD101C/with OSD